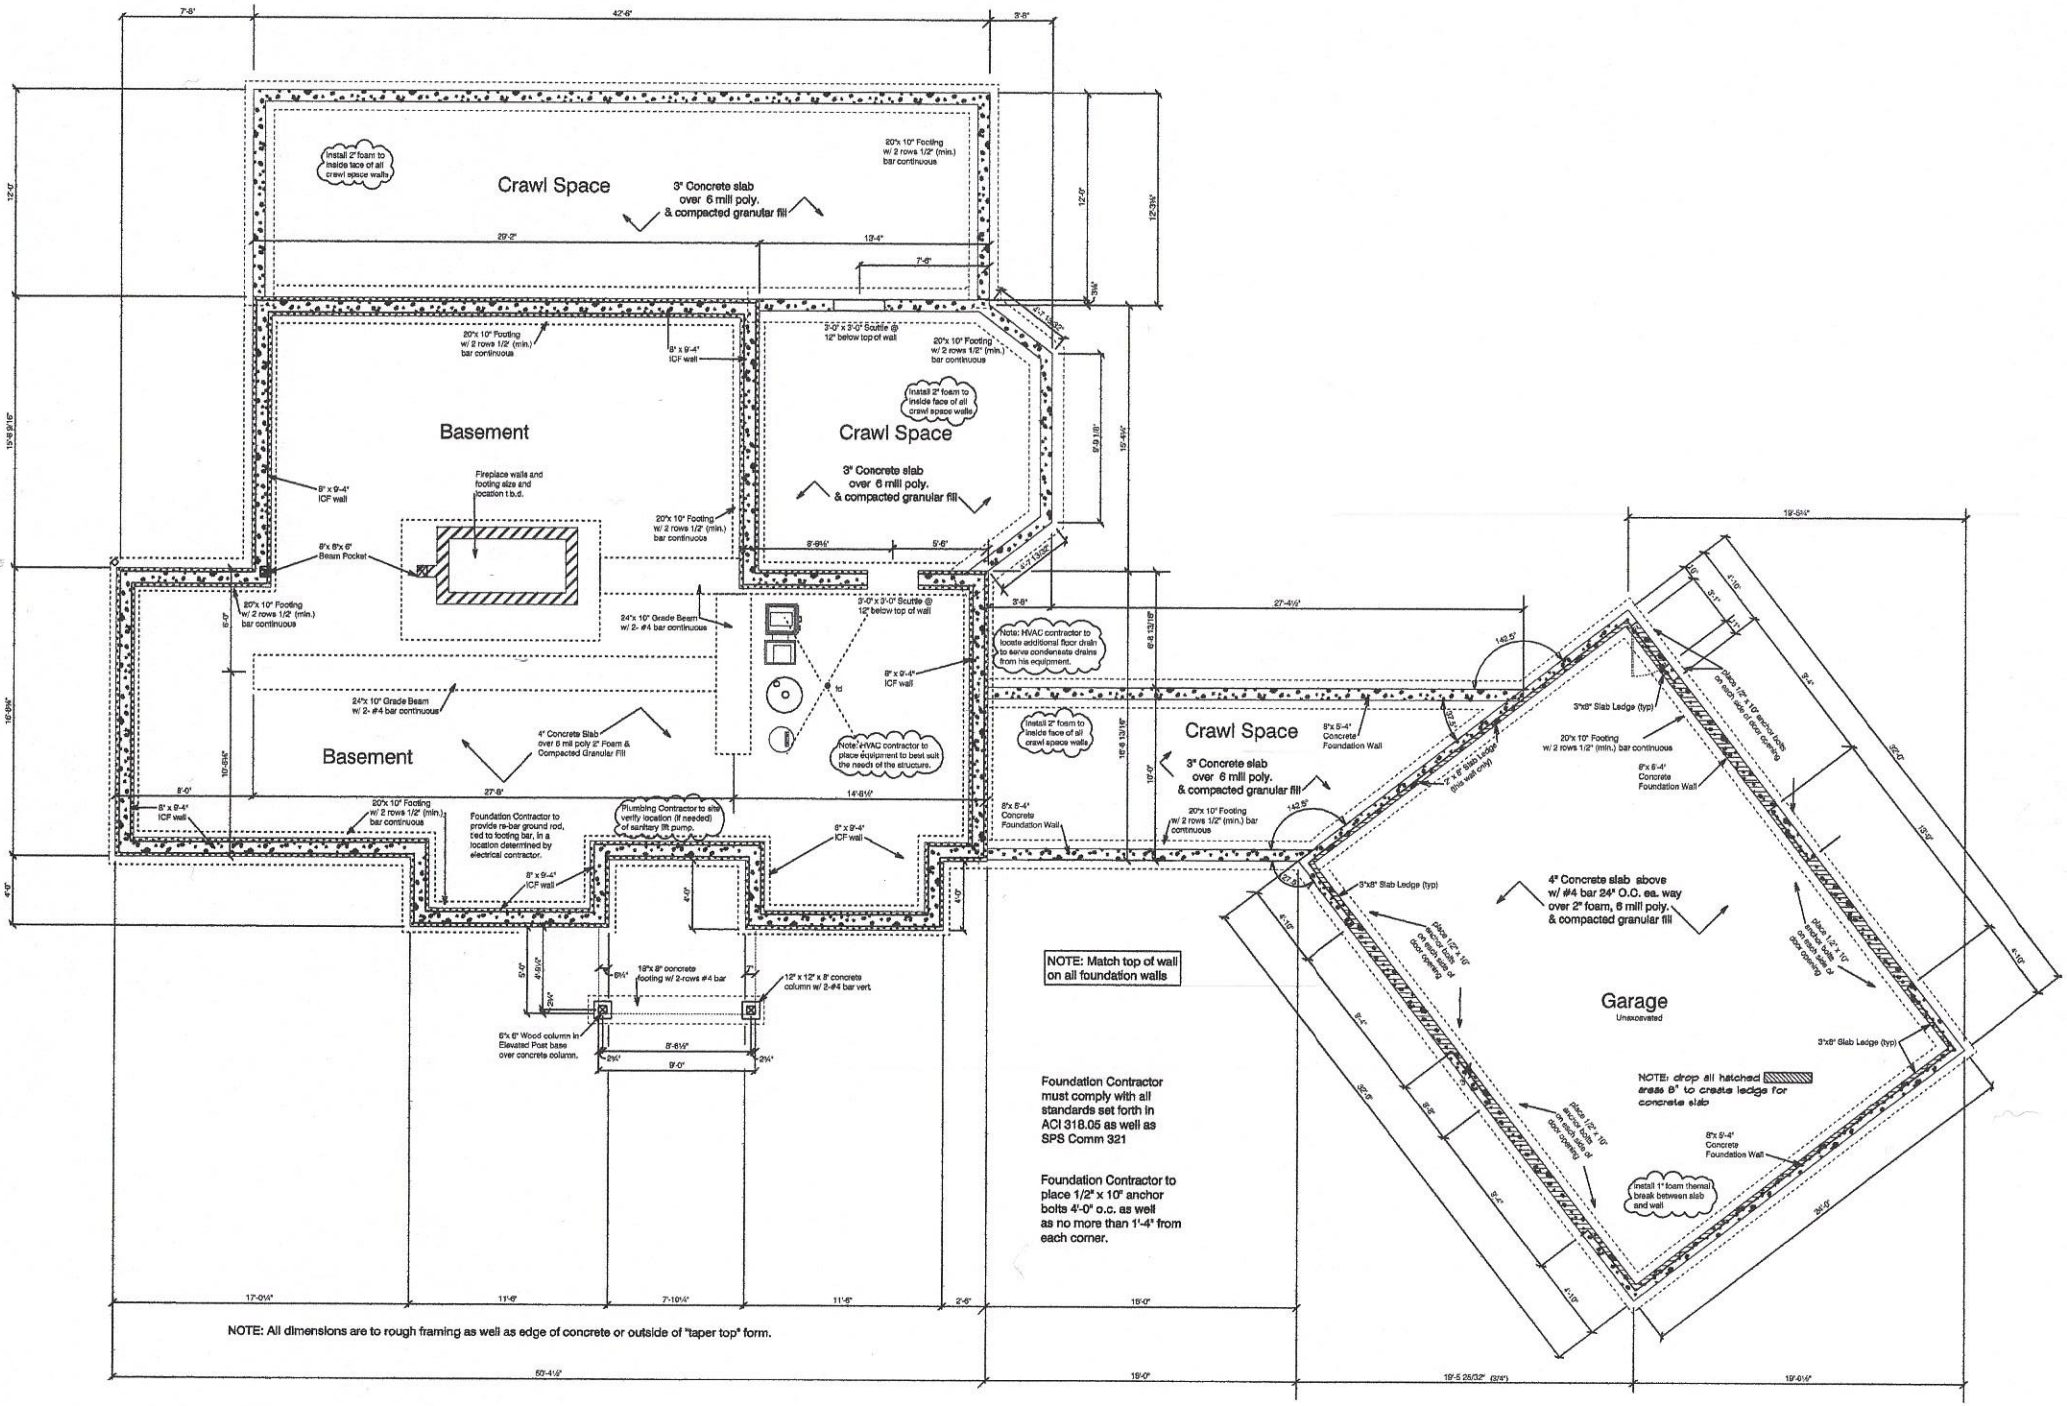
Crawl Space
3" Concrete slab over 6 mill poly. & compacted granular fill
Install 2" foam to inside face of all crawl space walls
20"x 10" Footing w/ 2 rows 1/2" (min.) bar continuous
Basement
8" x 9'-4" ICF wall
Fireplace walls and footing size and location t.b.d.
8"x 8"x 6" Beam Pocket
24"x 10" Grade Beam w/ 2- #4 bar continuous
3'-0" x 3'-0" Scuttle @ 12" below top of wall
Note: HVAC contractor to locate additional floor drain to serve condensate drains from his equipment.
Note: HVAC contractor to place equipment to best suit the needs of the structure.
4" Concrete Slab over 6 mil poly 2" Foam & Compacted Granular Fill
Foundation Contractor to provide re-bar ground rod, tied to footing bar, in a location determined by electrical contractor.
Plumbing Contractor to also verify location (if needed) of sanitary lift pump.
19"x 8" concrete footing w/ 2-rows #4 bar
12" x 12" x 8' concrete column w/ 2-#4 bar vert
6"x 6" Wood column in Elevated Post base over concrete column.
8"x 5'-4" Concrete Foundation Wall
20"x 10" Footing w/ 2 rows 1/2" (min.) bar continuous
3"x8" Slab Ledge (typ)
4" Concrete slab above w/ #4 bar 24" O.C. ea. way over 2" foam, 6 mill poly. & compacted granular fill
Garage
Unexcavated
NOTE: drop all hatched areas 8" to create ledge for concrete slab
Install 1" foam thermal break between slab and wall
NOTE: Match top of wall on all foundation walls
Foundation Contractor must comply with all standards set forth in ACI 318.05 as well as SPS Comm 321
Foundation Contractor to place 1/2" x 10" anchor bolts 4'-0" o.c. as well as no more than 1'-4" from each corner.
NOTE: All dimensions are to rough framing as well as edge of concrete or outside of "taper top" form.

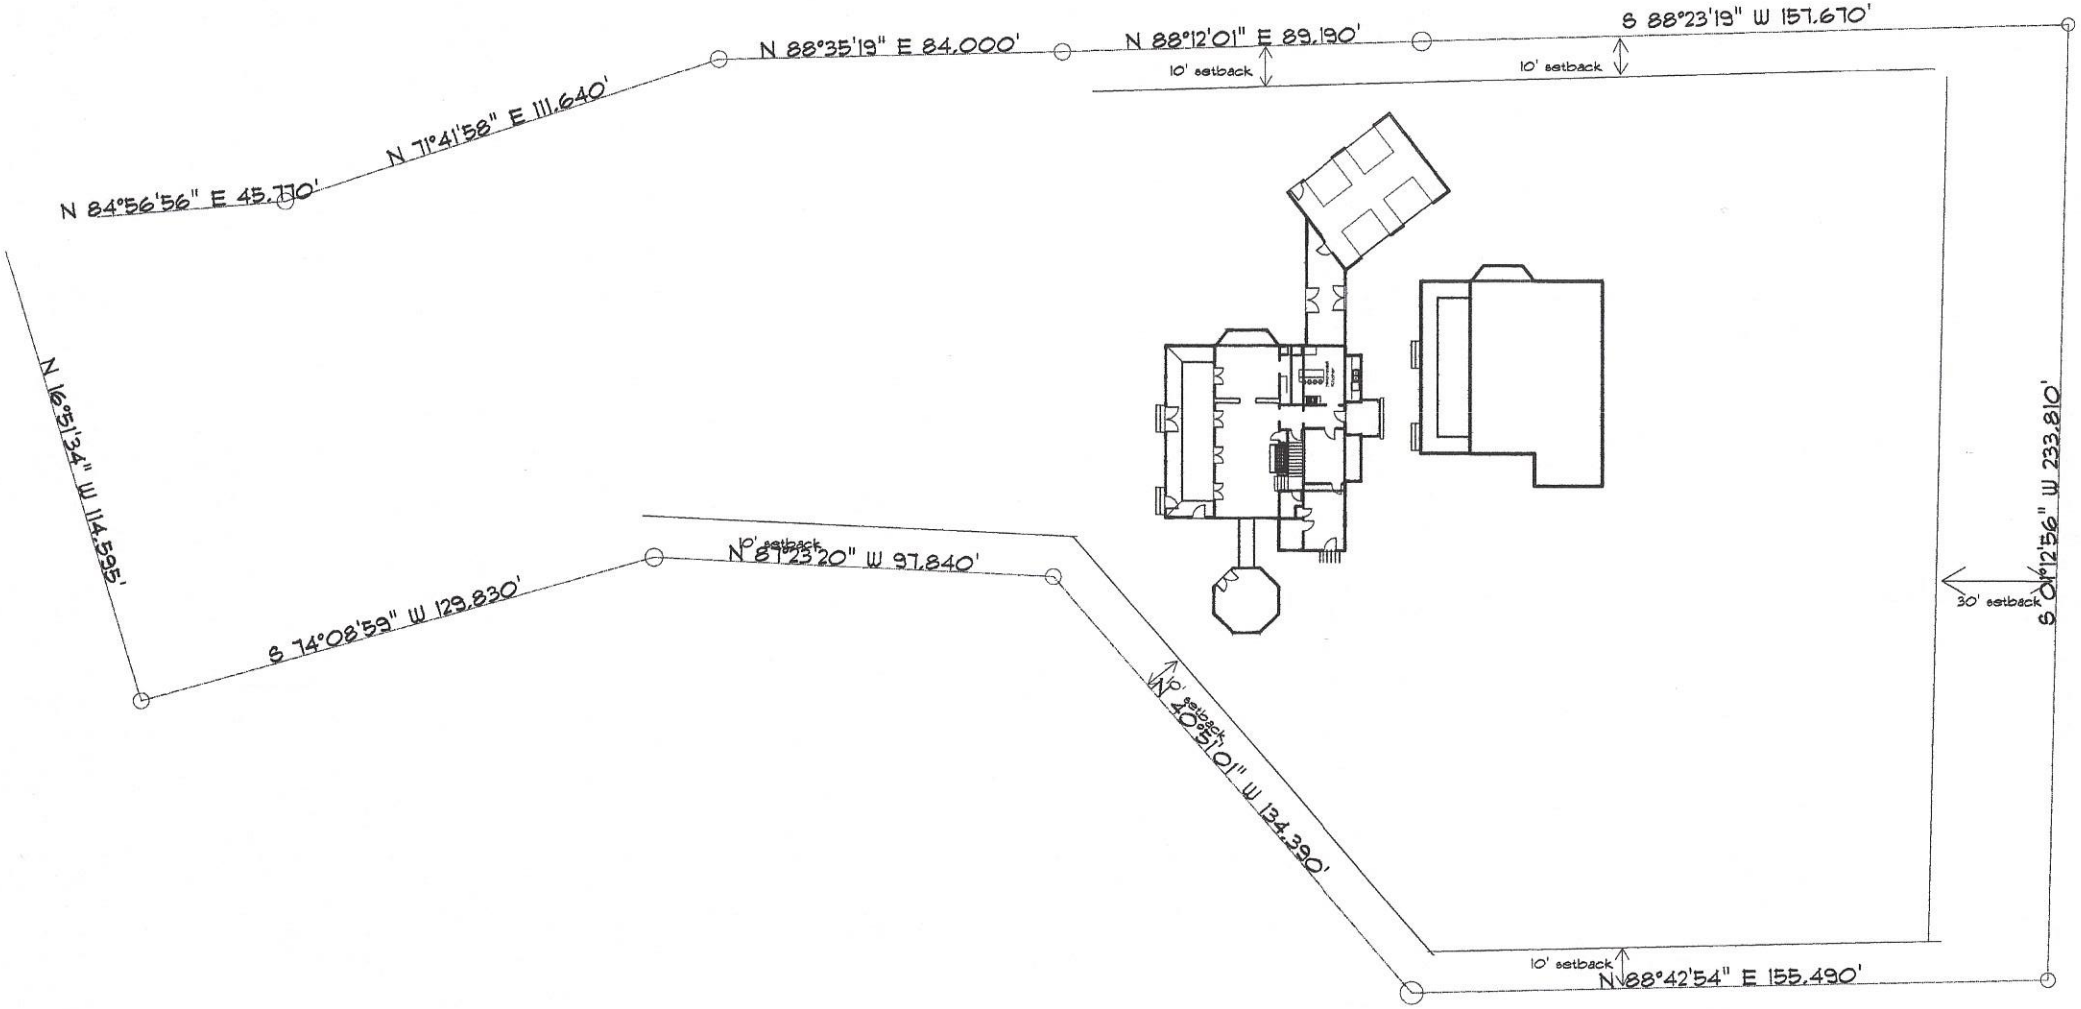
N 84°56'56" E 45.770'
N 71°41'58" E 111.640'
N 88°35'19" E 84.000'
N 88°12'01" E 89.190'
S 88°23'19" W 157.670'
10' setback
10' setback
N 16°51'34" W 114.595'
S 74°08'59" W 129.830'
10' setback
N 87°23'20" W 97.840'
10' setback
N 40°51'01" W 134.390'
10' setback
N 88°42'54" E 155.490'
30' setback
S 0°12'56" W 233.810'